Catalog Number						
Notes	Туре					

Description: Mounting Frame:

20 ga. galvanized steel. Accommodates ceilings up to 1" thick. Push-in/twistout rotoclips hold reflector flush to ceiling.

Junction Box:

14 ga. galvanized steel. Rated for 8 #12 AWM through branch circuit wires suitable for 90° C, for end of run 75° C. Quick release "L" shaped cover for access to wiring.

Mounting Bars:

Die-formed steel, 16 ga. Four bars, 13" long, extend to 27", permit off-center mounting; bars rotate 90° and lock in both directions;integral nailer for wood joists, locking tabs for T-bar runners.

Thermally Protected Ballast:

Single 2 lamp magnetic or universal voltage electronic, Class-P Rated. Insulation must be kept 3" away from fixture sides and wiring compartment and must not be placed above fixture as to entrap heat.

Socket Housing:

22 ga. galvanized spring steel; snap-in quick assembly for precise lamp location.

Socket:

Molded thermoplastic; prewired with #18 AWM leads to 4" X 3 1/2" X 2" junction box.

Reflector:

Hydroformed aluminum, 18 ga.; white gloss finish on inside and trim flange. Various reflector inserts are available, including specular clear, gold, white baffle, black baffle, and Die cast aluminum cross baffle (powder painted, matte white)


Listing/Code Compliance:

UL (Suitable for Damp Locations)





ECS SERIES Low Profile, Recessed 6" Aperture

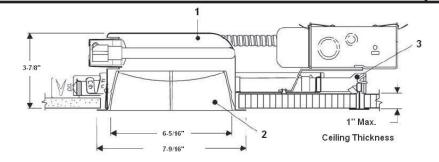

ORDERING INFORMATION

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Frame-	in Kit	Ballast	Voltage	Lamp Type		Electrical	
New Work	Remodel					Input Wattage	Input Current
ECS213	ECR213	NPF Magnetic	120V	2 Pin (G x 23)	13W Twin Tube	35W	.600A
ECS213H	ECR213H	HPF Magnetic	120V	2 Pin (G x 23)	13W Twin Tube	32W	.280A
ECS213H7	ECR213H7	HPF Magnetic	277V	2 Pin (G x 23)	13W Twin Tube	32W	.160A
ECS218E	ECR218E	HPF Electronic	120V/277V	4 Pin (G24q-2)	18W Quad Tube	40W	.34/.15A
ECS226E	ECR226E	HPF Electronic	120V/277V	4 Pin (G24q-3)	26W Quad Tube	56W	.47/.21A

Add suffix "EM" for Emergency Ballast option.

Reflector Trims

Alzak Cone		Step Baffle	Cross Blade	Fresnel Lens	Enclosed Diffuser	Wall Washer
ECT570	Clear	ECT349 Black	ECT340 White	ECT343	ECT342	ECT350
ECT580	Gold	ECT349WB White				



Office: 718-418-5600 • Fax 718-418-5618 57-10 49th Place • Maspeth, N.Y. 11378 www.encorelighting.com P/N75-1024 (03/06)